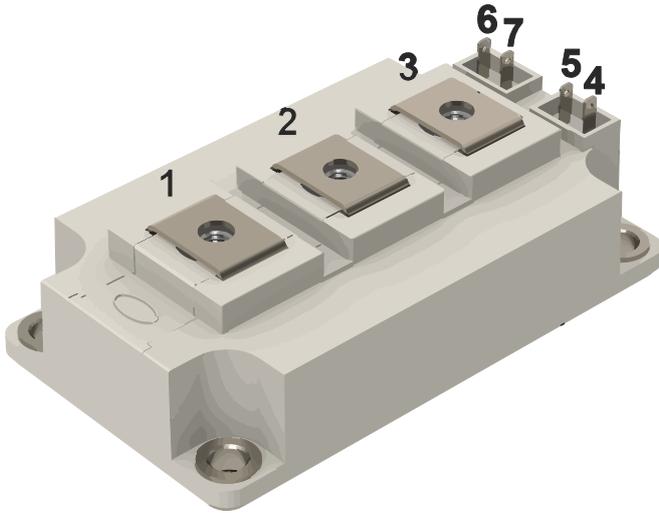


Industry standard 62mm IGBT module
1700V 300A

Chip features


- IGBT Chip
 - low $V_{CE(sat)}$ value
 - 10 μs short circuit @ 150°C
 - square RBSOA @ $2 \times I_C$
 - low EMI
- FRD Chip
 - fast and soft reverse recovery
 - low voltage drop

Design features

- copper baseplate
- Al₂O₃ DBC substrate
- ultrasonically welded power terminals
- improved thermal cycling
- RoHS compliant

Typical application

- AC motor drives
- solar inverter
- air conditioning
- high power converters and UPS

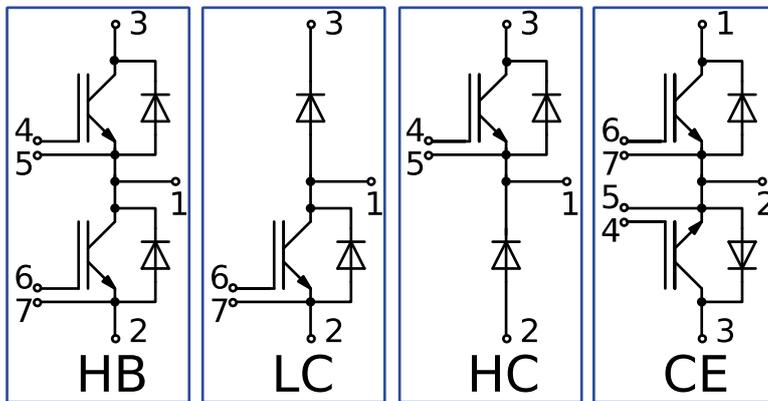
Maximum rated values

Definition	Symbol	Conditions	Value	Unit
IGBT				
Collector-Emitter voltage	V_{CES}	$V_{GE} = 0V$	1700	V
Collector current (nominal)	$I_{C\ nom}$		300	A
Collector current (maximum continuous)	$I_{C\ 25}$	$T_j = 175^\circ C, T_c = 25^\circ C$	478	A
	$I_{C\ 80}$	$T_j = 175^\circ C, T_c = 80^\circ C$	369	A
Repetitive peak collector current *1	I_{CRM}	$I_{CRM} = 3 \times I_{C\ nom}, t_p = 1ms$	900	A
Gate-Emitter voltage	V_{GES}		± 20	V
Junction temperature	T_j		-40 ... 175	°C
Inverse diode / Freewheeling diode				
Repetitive peak reverse voltage	V_{RRM}	$V_{GE} = 0V$	1700	V
Forward current (nominal)	$I_{F\ nom}$		300	A
Forward current (maximum continuous)	$I_{F\ 25}$	$T_j = 175^\circ C, T_c = 25^\circ C$	304	A
	$I_{F\ 80}$	$T_j = 175^\circ C, T_c = 80^\circ C$	220	A
Repetitive peak forward current *1	I_{FRM}	$I_{FRM} = 2 \times I_{F\ nom}, t_p = 1ms$	600	A
Surge (non-repetitive) forward current	I_{FSM}	$t_p = 1ms, \sin 180^\circ, T_j = 25^\circ C$	1800	A
Junction temperature	T_j		-40 ... 175	°C
Module				
Storage temperature	T_{stg}		-40 ... 125	°C
Isolation voltage	V_{isol}	AC sinus 50 Hz, t = 1min	4000	V


*1 Pulse width and repetition rate should be such that device junction temperature (T_j) does not exceed maximum T_j rating.

Characteristics

Definition	Symbol	Conditions	Value			Unit	
			min.	typ.	max.		
IGBT							
Collector-Emitter saturation voltage	V_{CEsat} (chip)	$V_{GE} = 15V$ $I_C = 300A$	$T_J = 25^\circ C$	-	1.90	2.20	V
			$T_J = 150^\circ C$	-	2.3	2.6	V
	V_{CEsat} (terminal)		$T_J = 25^\circ C$	-	2.00	2.30	V
			$T_J = 150^\circ C$	-	2.4	2.7	V
Gate-Emitter threshold voltage	$V_{GE(th)}$	$I_C = 12mA, V_{CE} = V_{GE}, T_J = 25^\circ C$	5.2	5.8	6.4	V	
Collector-Emitter cut-off current	I_{CES}	$V_{CE} = 1700V$ $V_{GE} = 0V$	$T_J = 25^\circ C$	-	-	4000	μA
			$T_J = 150^\circ C$	-	-	6000	μA
Gate-Emitter leakage current	I_{GES}	$V_{CE} = 0V, V_{GE} = \pm 20V$	-	-	1800	nA	
Input capacitance	C_{ies}	$V_{CE} = 25V, V_{GE} = 0V$ $f = 1MHz, T_J = 25^\circ C$	-	27200	-	pF	
Output capacitance	C_{oes}		-	1006	-	pF	
Reverse transfer capacitance	C_{res}		-	880	-	pF	
Total gate charge	Q_G		$I_C = 300A, V_{CE} = 600V, V_{GE} = -8 \div 20V$	-	2400	-	nC
Internal gate resistance	R_{Gint}	$T_J = 25^\circ C$	1.85	2.5	3.15	Ω	
Turn-on delay time	$t_{d(on)}$	$V_{CE} = 1200V, I_C = 300A,$ $R_G = 2.0\Omega, V_{GE} = \pm 15V,$ $T_J = 150^\circ C,$ $di/dt_{on} = 10209 A/\mu S,$ $du/dt_{off} = 4580 V/\mu S$	-	207	248	ns	
Rise time	t_r		-	37.5	45	ns	
Turn-on energy	E_{on}		-	88	106	mJ	
Turn-off delay time	$t_{d(off)}$		-	756	907	ns	
Fall time	t_f		-	154	185	ns	
Turn-off energy	E_{off}		-	121	145	mJ	
Short circuit duration	t_{psc}	$V_{cc} = 720V, V_{GE} \leq 20V,$ $T_J = 150^\circ C, \text{non-repetitive}$	-	-	10	μs	
Collector-emitter threshold voltage	V_{CE0}	$V_{GE} = 15V, T_J = 150^\circ C$	-	0.7	0.8	V	
On-State slope resistance (IGBT)	r_{CE0}	for static power loss calculation	-	5.33	6.0	m Ω	
Thermal resistance junction to case	$R_{th(j-c)}$	per IGBT	-	-	0.085	K/W	
Inverse diode / Freewheeling diode							
Continuous forward voltage	V_F (chip)	$I_F = 300A$	$T_J = 25^\circ C$	-	2.00	2.40	V
			$T_J = 150^\circ C$	-	2.14	2.56	V
	V_F (terminal)		$T_J = 25^\circ C$	-	2.10	2.50	V
			$T_J = 150^\circ C$	-	2.25	2.65	V
Peak reverse recovery current	I_{RM}	$V_{cc} = 1200V$ $I_F = 300A$ $di_F/dt = 4800$ $A/\mu S$	$T_J = 25^\circ C$	-	270	324	A
Reverse recovered charge	Q_{rr}		$T_J = 150^\circ C$	-	360	432	A
			$T_J = 25^\circ C$	-	50	60	μC
Reverse recovery energy	E_{rr}		$T_J = 150^\circ C$	-	120	144	μC
			$T_J = 25^\circ C$	-	28	34	mJ
$T_J = 150^\circ C$	-		68	82	mJ		
Forward threshold voltage (Diode)	V_{F0}	$T_J = 150^\circ C$	-	1.08	1.22	V	
On-state slope resistance (Diode)	r_F	for static power loss calculation	-	3.5	4.5	m Ω	
Thermal resistance junction to case	$R_{th(j-c)}$		-	-	0.19	K/W	
Module							
Parasitic inductance Collector-Emitter	L_{CE}		-	30	-	nH	
Resistance terminal-chip	$R_{CC'}+R_{EE'}$	terminal-chip $T_J = 25^\circ C$	-	0.5	-	m Ω	
Thermal resistance case to heatsink	R_{thCH}	per module	-	0.05	-	K/W	
Mounting torque for screws to heatsink	M_s	to heatsink M6	3	-	5	Nm	
Mounting torque for terminal screws	M_t	to terminals M5	2.5	-	5	Nm	
Weight	W		-	-	340	g	



Overall dimensions: Package type AA

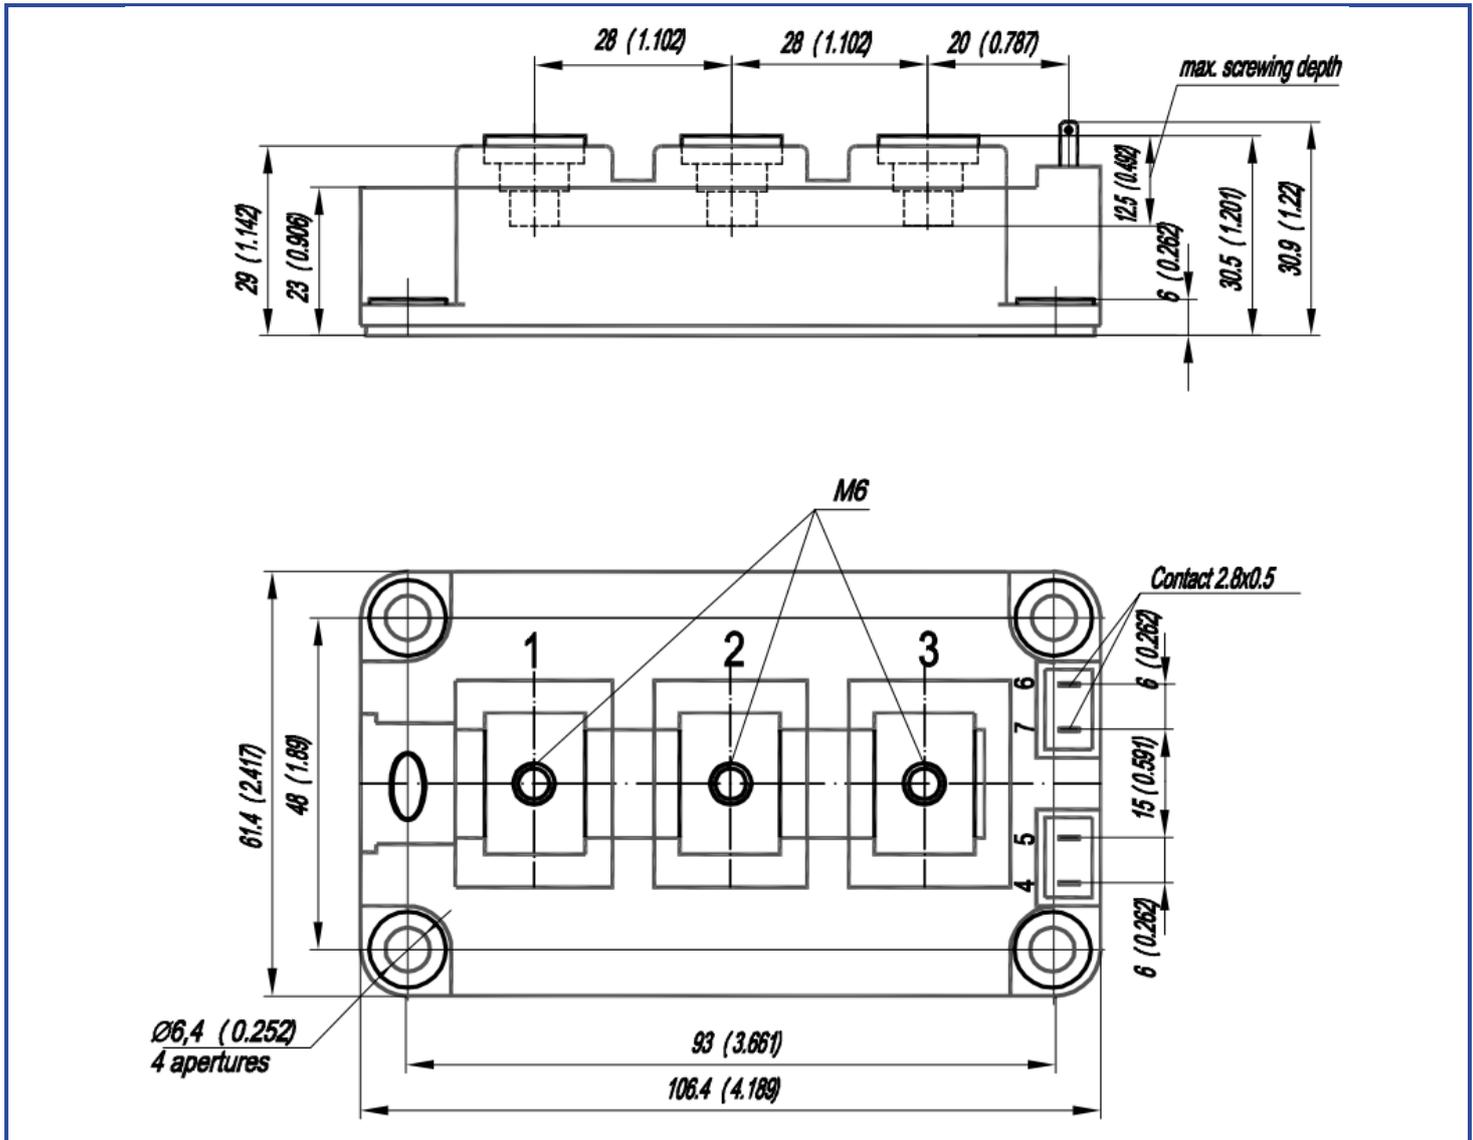

Part numbering guide

MIAA	-	HB	17	FA	-	300	N	
MIAA								IGBT module package type: AA
		HB						2 switches as Half-Bridge
		HC						1 switch as High-Side chopper
		LC						1 switch as Low-Side chopper
		CE						2 switches with Common Emitter
			17					Voltage rating ($V_{CES}/100$)
				FA				IGBT+FRD chipset modification
					300			Current Rating
							N	Climatic version: normal climate

This datasheet is a tentative target data. The information in this document will be updated according to product qualification test results.

The information contained herein is protected by Copyright. In the interest of product improvement, Proton-Electrotex reserves the right to change datasheet without notice.